


## Measurements are to include detail of wall composition

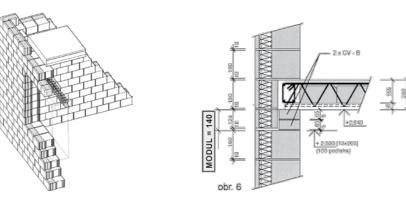

In certain applications it is impossible to achieve properly functioning and levelled sunroom if the variance between individual corners is more than 20mm.

If sunroom is mounted on a surface less than that of 20mm variance, variance differences can be shimmed/ sealed.

## 1.Wall supporting material

Concrete	Solid brick	Hollow brick	Ytong
Other			
2. Insulation			
No	Yes	Width of insulation	
3. Vertical surface finish	(e.g. Novabrick)		
Brick		Siding	Stucco
4. Uninterrupted vertical	mounting surface (e.g. lightni	ng conductor or gutter)	
Yes		No (description and photo necessary)	
5. Decking material			
Concrete		Patio stone	
Patio slab – stone on screer	ning	Interlocking stone on screening	
Interlocking stone on conci	rete	Wood	
Other			
6. Deck area slope			
Left wall corner	Left outside corner	Right wall corner	Right outside corner
Measure slope using left wall corner as s	starting point		

## SUROOM REQUIREMENTS AND TECHNICAL DATA

	Standard	Custom	Not Available
Configuration	Width up to 450cm	XL profiles on width 451cm to 650cm	
	1 fixed wall	2 fixed walls	
	Sliding single or double door in face panel. Lockable from the outside	Non-lockable from the outside	
	Fixed small module		
	Sliding door in largest module	Sliding door in middle module	
Top Glazing	4mm PC		8mm double wall
	Side Glazing	6mm SAN	
Mouting Surface	Flat structural surface	Non structural surface up to 10cm	Uneven mounting surface
		Vertical surface thickness change	
Decking	Leveled decking area		
Evesthrough	Up to 7m		
	Over 7m on both sides		
Colour Options	Any RAL	Décor (some parts in colour of décor only)	Elox
	Tracks	Elegance Elox	11mm Standard Elox
Insulating Properties	R value =5.2 W/m2		
Water Resistance	Conditional		
Air Tight	No		





















ALBIXON a.s. Zbraslavská 55, 159 00 Prague 5, CZECH REPUBLIC

Customer line +420 775 852 111

Fax: +420 251 094 051

ALBIXON.com

ALBIXON.com